



SURVEILLANCE & ENTRANCE PRODUCTS



**CCTV
PRODUCTS**



**ENTRANCE
PRODUCTS**



**UHF
READER**



**RFID
CARDS**



**ACCESS
CONTROL**





AGS+

ABOUT US

AGS+ manufactures best products for Surveillance and Entrance Automation , we believe in quality and deliveries , we want to make sure that our associates break all barriers and bring new revolution in the industry with dynamic product range .

Mission


“Our aim is to make all Surveillance and Entrance Products in INDIA and working in the same direction , will do new wonders in the industry ASAP with our partner’s support.”

Vision

“We want to grow with happy customers , therefore will make our best products and deliver the same”

Belive

“Always believe in feedback and act on the same.”

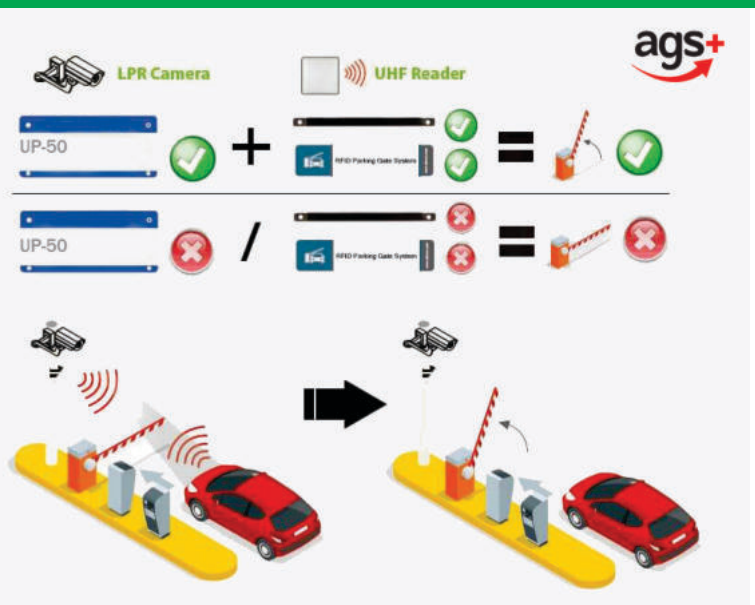

IP Indoor Camera



- AGS-1045I4PDC**
4MP IP Color View Indoor Camera
- 1/2.8" low illumination CMOS sensor
 - 4MP HD Resolution
 - 3.6mm fixed lens
 - 2 Warm Led & 2 IR Range upto 15 to 20 mtr



- AGS-1045I5PDC**
5MP IP Color View Indoor Camera
- 1/2.8"IMX Low illumination CMOS sensor
 - 5MP HD Resolution
 - 3.6mm fixed lens
 - 2 Warm Led & 2 IR Range upto 15 to 20 mtr



- AGS-1045I8PDC**
8MP IP Indoor Color View Camera
- 1/3" low illumination CMOS sensor
 - 8MP HD Resolution
 - 3.6mm fixed lens
 - 2 Warm Led & 2 IR Range upto 15 to 20 mtr

IP Outdoor Camera



- AGS-2045I4PDC**
4MP IP Outdoor Color View Camera
- 1/2.8" low illumination CMOS sensor
 - 4MP HD Resolution
 - 3.6mm fixed lens(6mm Optional)
 - 2 Warm Led & 2 IR Range upto 25 to 30 mtr



- AGS-2046I5PDC**
5MP IP Outdoor Color View Camera
- 1/2.8" low illumination CMOS sensor
 - 5MP HD Resolution
 - 3.6mm fixed lens(6mm Optional)
 - 2 Warm Led & 2 IR Range upto 25 to 30 mtr



- AGS-2047I8PDC**
8MP IP Outdoor Color View Camera
- 1/2.8" low illumination CMOS sensor
 - 8MP HD Resolution
 - 3.6mm fixed lens(6mm Optional)
 - 2 Warm Led & 2 IR Range upto 25 to 30 mtr

HD Indoor Camera



- AGS-1010A2P**
2.4MP HD Indoor Camera
- 1/2.8" CMOS sensor
 - 2.4MP HD Resolution
 - 3.6mm fixed lens
 - 18 smart IR Range upto 15 to 20 mtr
 - [CE,RoHS Certified]



- AGS-1042A2PC**
2.4MP HD Indoor Color View Camera
- 1/2.8" low illumination CMOS sensor
 - 2.4MP HD Resolution
 - 3.6mm fixed lens
 - 2 warm Led Range upto 15 to 20 mtr
 - Night coloview Vision
 - Inbuilt Mic
 - [CE,RoHS Certified]



- AGS-1042A5PC**
5MP HD Indoor ColorView Camera
- 1/3" low illumination CMOS sensor
 - 5MP HD Resolution
 - 3.6mm fixed lens
 - 2 warm Led Range upto 15 to 20 mtr
 - Night coloview Vision
 - Inbuilt Mic
 - [CE,RoHS Certified]

HD Outdoor Camera



- AGS-1043A5PC**
2.4MP HD Outdoor True View Camera
- 1/2.8" CMOS sensor
 - 2.4MP HD Resolution
 - 3.6mm fixed lens
 - 18 smart IR Range upto 15 to 20 mtr
 - [CE,RoHS Certified]



- AGS-1043A2PC**
2.4 MP HD Outdoor ColorView Camera
- 1/2.8" low illumination CMOS sensor
 - 2.4MP HD Resolution
 - 3.6mm fixed lens
 - 2 warm Led Range upto 15 to 20 mtr
 - Night coloview Vision
 - Inbuilt Mic
 - [CE,RoHS Certified]



- AGS-1043A5PC**
2.4 MP HD Outdoor Color View Camera
- 1/2.8" low illumination CMOS sensor
 - 2.4MP HD Resolution
 - 3.6mm fixed lens
 - 2 warm Led Range upto 15 to 20 mtr
 - Night coloview Vision

VERIFOCAI CAMERA



AGS-208514

4MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 4MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 50 to 60 mtr



AGS-208515

5MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 5MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 50 to 60 mtr



AGS-208518

8MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 8MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 30 to 40 mtr

PTZ CAMERA



AGS-2M-SDA-25x

2MP IP PTZ

- 2MP IP-CMOS SENSOR
- IR Distance up to 150M
- Resolution : 2MP(1920X1080)
- 25X , f=5.5mm~110mm
- Power : DC12V



AGS-5M-SDA-30x

5MP IP PTZ

- 5MP IP-CMOS SENSOR
- IR Distance up to 200M
- Resolution : 5MP(2560X1440)
- 25X , f=4.7mm~141mm
- Power : DC12V



AGS-4M-SD-WIFI

4MP WiFi PTZ

- 1/2.9" CMOS Sensor (2.0MP)
- WiFi, P2P, Web support
- Pan-Tilt, Microphone, speaker, SD card supported
- Motion detecting

WIFI / 4G CAMERA



WIFI DOME / BULLET

104814-4G/204814-4G

- 1/3" Image Sensor (4.0 MP)
- 3.6 mm Fixed Lens
- Mic, Speaker, SD Card 128GB
- WiFi, P2P, Web Support, onvif



WIFI DOME / BULLET

104814-WIFI/204814-WIFI

- 1/3" Image Sensor (4.0 MP)
- 3.6 mm Fixed Lens
- Mic, Speaker, SD Card 128GB
- All 4G Sim Card Supported,
- P2P, Web Support, onvif

4G Router



4G Router

AGS-4G-RI

- Support 4G SIM
- Wireless Monitoring & IOT
- Power Supply 12V DC
- 10/100 RJ-45 Lan Port
- High Stable Signal
- All SIM Supported
- 3 Omni Antenna 5dbi

ANPR CAMERA



AGS-2M-ANPR

2MP/4MP, Capture Speed Range 0~70km/h
 Image Sensor: 1/2.8 "CMOS, Electronic Shutter: 1/25 \$ ~ 1/100000s,
 Lens: 2.8~12mm@F1.4, motorized and 7~22mmMmM@F1.6, motorized,
 Wide Dynamic Range: 120dB, Smart H.265 / H.265+/H.265/Smart
 H.264/H.264+/H.264/MJPEG60Hz : 1080P/720P (1 ~30fps);
 HER Mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)
 50Hz : 1080P/720P.() ~25fps), Intelligent Analytics Video tampering
 detection, scene change detection, license plate recognition,
 Snapshot Overview and cutout of plate for picture,
 White List 10000, Power Supply DC12V/PoE



AGS-4M-ANPR

NVR (Network Video Recorder)



AGS-10NVR-1H, 9CH NVR 1HDD

Bandwidth:50Mbps
 Live Preview Capability:Up to 9 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 10TB
 Support Two-way audio;



AGS-16NVR-1H 16CH NVR 1HDD

Bandwidth:64Mbps
 Live Preview Capability:Up to 16 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 10TB
 Support Two-way audio;



AGS-32NVR-2H 32CH NVR 2HDD

Bandwidth:160Mbps
 Live Preview Capability:Up to 32 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 2 x SATA Hard Disk Max 10TB Each
 Support Two-way audio;



AGS-64NVR-8H 64CH NVR 8HDD

64CH 4K NVR: OS Embedded Linux
 Standard : H.265, H.264,12MP/ 8MP/ 6MP/ 5MP/ 4MP/3MP/1080P/1280×1024/960P/ 720P/960H/D1/CIF, Dual stream recording,
 SATA×8, up to 8TB per HDD, E-SATA×2, RAID0, RAID1, RAID5, RAID6, RAID10,
 Mobile Device iOS, Andriod

HD DVR/XVR



AGS-4XVR-1H 4CH XVR 1HDD

Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB



AGS-8XVR-1H 8CH XVR 1HDD

Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB



AGS-16XVR-1H 16CH XVR 1HDD

Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB

P2P



AGS-P2P-150-M

wireless transmission upto 500m
 Works on 2.4 GHZ frequency
 Transmission Speed of 150 Mbps
 Power DC 12v & 24v POE
 Transmitter power 19 dbm
 Antenna gain 12 dbi
 W/P Standard IP-66



AGS-P2P-350-L

wireless transmission upto 2 km
 Works on 5.8 GHZ frequency
 Transmission Speed of 300 Mbps
 Power DC 12v & 24v POE
 Transmitter power 23 dbm
 Antenna gain 17 dbi
 W/P Standard IP-66



AGS-P2P-450-XL

wireless transmission upto 4 km
 Works on 5.8 GHZ frequency
 Transmission Speed of 300 Mbps
 Power DC 12v & 24v POE
 Transmitter power 27 dbm
 Antenna gain 19 dbi
 W/P Standard IP-66

PoE Switches



AGS-400P-2UP 4+2 PORT POE SWITCH

- 4Nos 10/100 PoE Ports
- 2Nos 10/100 RJ45 Uplink port
- 96W total Power Budget
- 1.2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-400P-2UPG 4+2 PORT (GIGA UPLINK) POE SWITCH

- 4Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 96W total Power Budget
- 4.8G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-4000P-2UPG 4+2 PORT (FULL GIGA) POE SWITCH

- 4Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 96W total Power Budget
- 12G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-800P-2UP 8+2 PORT POE SWITCH

- 8Nos 10/100 PoE Ports
- 2Nos 10/100 RJ45 Uplink port
- 120W total Power Budget
- 2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-800P-2UPG 8+2 PORT (GIGA UPLINK) POE SWITCH

- 8Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 120W total Power Budget
- 5.6G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-8000P-2UPG 8+2 PORT (FULL GIGA) POE SWITCH

- 8Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 120W total Power Budget
- 20G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-8000P-2F-2UPG 8+2+2 PORT (FULL GIGA WITH SFP) POE SWITCH

- 8Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 2Nos 10/100/1000 SFP Uplink port
- 120W total Power Budget
- 24G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-1600P-1F-2UPG 16+2+1 PORT (GIGA Uplink WITH SFP) POE SWITCH

- 16Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 1Nos 10/100/1000 SFP Uplink port
- 300W total Power Budget
- 9.2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



AGS-2400P-2F-2UPG 24+2+1 PORT (FULL GIGA WITH SFP) POE SWITCH

- 24Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 2Nos 10/100/1000 SFP Uplink port
- 300W total Power Budget
- 38G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at

10/100/1000 Media Converters



AGS-MC1312-20
10/100/1000M SM Dual Fiber,
1310nm, SC, 20Km



AGS-MC8512-02
10/100/1000M MM Dual Fiber,
850nm, SC, 2Km



AGS-MCBI3512-20 / AGS-MCBI5312-20
10/100/1000M SM Single Fiber,
T1310/1550nm, SC, 20Km

SMPS



AGS-4SMPS
4Port SMPS 12v 5amp



AGS-8SMPS
8Port SMPS 12v 7.5amp



AGS-16SMPS
16Port SMPS 12v 15amp

CAT6 OUTDOOR



AGS-MC1312-20
 WEATHER PROOF DOUBLE JACKET
 EC GRADE COPPER
 42 MICRON ALUMINIUM FOIL
 INTERNATIONAL STANDARD TWISTING
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

CAT6 INDOOR




AGS-MC1312-20
 Cat6 Indoor
 EC GRADE COPPER
 FR FRESH PVC
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

CAT6 ARMoured



AGS-MC1312-20
 HEAVY 0.557 COPPER GAUGE
 EC GRADE COPPER
 0.8 MM ALUMINIUM ROD
 OUTER LD PVC
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

FIBER CABLE



AGS-MC1312-20
 OPTICAL FIBER (FRP & ARMoured)
 GOOD QUALITY HDPE
 HIGH QUALITY GLASS MATERIAL
 HIGH DATA SIGNAL PASSING CABLE
 WITH OTDR REPORT
 CORE 2 TO 96 CORE AVAILABLE
 IN FRP, FRP WITH YARN & ARMoured

CAT6 Patch Cord



AVAILABLE IN 2MTR, 3MTR & 5MTR
 AVAILABLE IN STANDARD PACKING

3+1 CCTV Cable



F.R FRESH PVC
 EC GRADE COPPER
 HIGH PERFORMANCE
 CCTV CABLE

SFP 1G (DUAL FIBER)



AGS-7512-02D
 SFP, 1.25G, 850NM,
 500M, MMF, DDM



AGS-7512-20D
 SFP, 1.25G, 1310nm,
 20km, SMF, DDM



AGS-7512-40D
 SFP, 1.25G, 1550NM,
 40KM, SMF, DDM

SFP 1G BIDI



AGS-BI5612-20D
 SFP, BIDI, 1.25G, 1310/1550NM,
 20KM, SMF, DDM
AGS-BI512-20D
 SFP, BIDI, 1.25G, 1550/1310NM,
 20KM, SMF, DDM



AGS-BI5612-40D
 SFP, BIDI, 1.25G, 1310/1550NM,
 40KM, SMF, DDM
AGS-BI6512-40D
 SFP, BIDI, 1.25G, 1550/1310NM,
 40KM, SMF, DDM

SFP+ 10G BIDI



AGS-BI4396-20
 SFP+, 10G, BIDI, 1270/1330NM,
 20KM, SMF, DDM
AGS-BI3496-20
 SFP+, 10G, BIDI, 1330/1270NM,
 20KM, SMF, DDM



AGS-BI4596-40
 SFP+, 10G, BIDI, 1270/1330NM,
 40KM, SMF, DDM
AGS-BI5496-40
 SFP+, 10G, BIDI, 1330/1270NM,
 40KM, SMF, DDM

WALL MOUNT TYPE-19 INCH,




AGS-LIU-6F/12F/24F/48W
 6/12/24/48 Port, Rack Mount LIU

RACK MOUNTING SLIDING TYPE-19 INCH



AGS-LIU-6F/12F/24F/48
 6/12/24/48 Port, Rack Mount LIU

FiberPatch cord

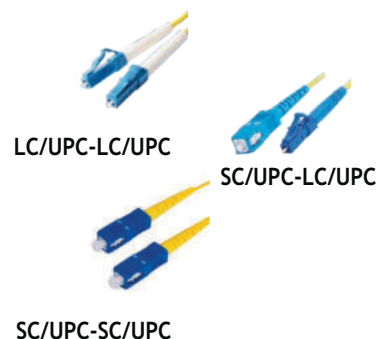

LC/UPC-LC/UPC

SC/UPC-LC/UPC

SC/UPC-SC/UPC

Entrance Products




Parking Boom Barrier



AGS-SFB25
 Super Fast Boom Barrier
 Motor : 24V DC Brushless Motor
 Opening / Closing Time : 2.5 Sec
 Length: Up to 6mtr
 Telescopic Boom

Types of Boom Arms

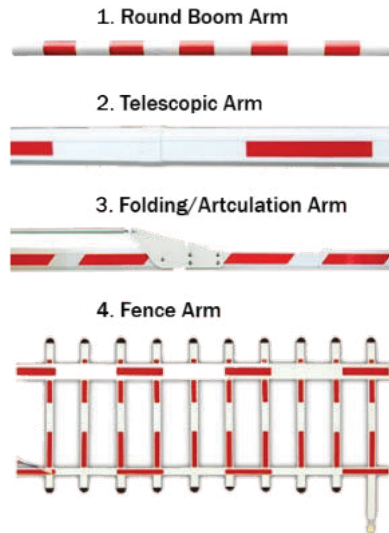

Toll Boom Barrier



AGS-TB6
 Toll Boom Barrier
 Motor : 24V DC Brushless Motor
 Opening / Closing Time : 0.6 Sec
 Length: Up to 3mtr
 Round Boom Straight Arm

Parking Products



AGS-TV01
 Automatic Ticket Dispenser
 Input Supply : 220V AC
 Communicate : TCPIP
 Card Support : Mifare
 Reading range : 5-10 cm



AGS-USS11
 Ultrasonic Sensor
 Input Supply : 10V-24V DC
 Detection Mode : Ultrasonic Detection
 Detecting Distance : 0.3m to 4.5m



AGS-LD21
 Display Unit
 Input Supply : 220V AC
 Display : 5mm Ultra Bright
 Communicate : RS 485
 Enclosure : MS Powder Coated

UHF Reader



AGS-U60019001 / AGS-U60019001-RJ
Weigand / Rs232/ TCPIP
Frequency : 865-868MHz/902-928MHz
Range : 6Mtr*




AGS-U15001200 / AGS-U15001200-RJ
Weigand : RS232 / Rs232 TCPIP
Frequency : 865-868MHz/902-928MHz
Range : 15Mtr*




AGS-URP
UHF Reader Pole


Access Controller

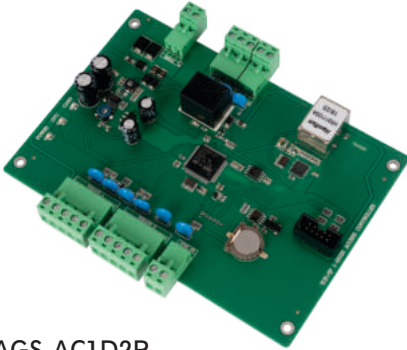

AGS-AC1D2R
1 Door / 2 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34

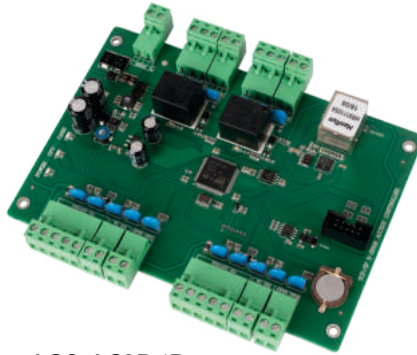

AGS-AC2D4R
2 Door / 4 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34

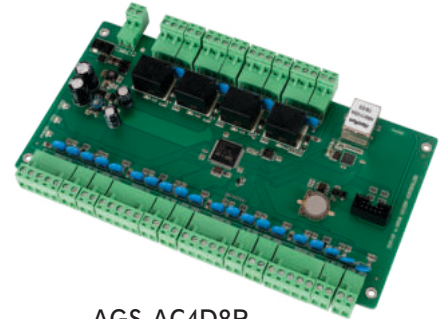

AGS-AC4D8R
4 Door / 8 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34

Loop Detector



AGS-LD100
Sensitivity: Adjustable in 4 levels
Response Time: 10ms
Working Temperature: -20C~+65 C°
Max Loop Size: 8Mx1M
Output Mode Relay
Power Supply: AC110/220V +-10% 50/60Hz; DC 12/24V



AGS-SBS100
Power supply : 12V~24V AC/DC
Max. Range: 15M
Input: RX 15mA, TX 30mA
Infrared frequency: 1.92KH
Wave length: 940nm
Relay output: 1A max 36V

Push Button



AGS-PB100
Material: Polyvinyl Chloride
Colour : Green,Red, Yellow
Style : Circuits,Safety
Finish Type : Pvc

Traffic Light



AGS-TL
Modular design, LED-based traffic signals
Applications include traffic and industrial signaling
Wide operating voltage range 100-240VAC
High quality, high output LED light source
Size-50mm/100mm/200mm/300mm
Module shape- Round

Flashing Light&Siren



AGS-FLS
Flasher Light Hooter Siren Standalone for
220 volt Ac/ 110 Volt Ac Operate and 12 Volt
DC, 24 Volt DC for Alarm System

Flap Barriers



AGS-FB-1100/2200
 Single /Multi Lane Flap Barrier with LED
 Housing Material : SS 304
 Indicators : LED for direction with arrow marks
 Bi-directional single passage/ multi passage
 Free passage in the set direction Feature
 Always free or locked Feature

Swing Barriers



AGS-SFB-1100/2200
 Single /Multi Lane Swing Barrier with LED
 Housing Material : SS 304
 Indicators : LED for direction with arrow marks
 Bi-directional single passage/ multi passage
 Free passage in the set direction Feature
 Always free or locked Feature

Vertical Turnstile



AGS-VT-1100
 Vertical Turnstile
 Housing Material : SS 304
 Direction : Single or bi-directional
 Indicators: LED for direction with arrow marks
 Free passage in the set direction Feature
 Always free or locked Feature

Bridge Turnstile



AGS-BT1100
 Vertical Turnstile
 Housing Material : SS 304
 Direction : Single or bi-directional
 Indicators: LED for direction with arrow marks
 Free passage in the set direction Feature
 Always free or locked Feature

Full Height Turnstile



AGS-FHT-1100/2200
 Single/Dual Lane Full Height Transtile
 Housing Material : SS stainless steel outer body & arms
 Direction : Single or bi-directional
 Indicators : LED for direction with arrow marks
 Free passage in the set direction Feature
 Always free or locked Feature

P Type Swing Gate



AGS-PSG-1100
 Housing Material : SS 304
 Indicators : LED for direction with arrow marks
 Bi-directional single passage/ multi passage
 Free passage in the set direction Feature
 Always free or locked Feature

Tyre Killer



AGS-TK3000/4000/6000
 Robust Construction
 capable of puncturing vehicle tires effectively
 Motorized Operation
 Integrated Safety Features
 Anti-Corrosion Coating
 Anti-Tamper Mechanism
 Modular Design

Bollard



AGS-AB3300
 Automatic Rising and Lowering
 Remote Control Operation
 Durable Construction
 built-in LED lights or reflective strips to enhance visibility
 Can Be Integrated with traffic Management system.

Road Blocker



AGS-RB2200
 Easy installation
 Sturdy construction
 Available in varied patterns

Baggage Scanner



AGS-BS550
 High-Resolution X-ray-Imaging
 Multiple Viewing Modes
 Threat Detection Algorithms
 Automated Detection of -Threat Objects
 Can be connected with -Surveillance System
 Compliance with Regulatory-Standards

DFMD



AGS-DFMD-1Z/6Z/9Z
 Single / Multi-Zone Detection (1zone to32zone)
 Alarm System
 Discrimination Technology
 User-Friendly Interface
 Durable Construction
 Counting Function
 Portable / Easy to Installation

HHMD



AGS-HHMD
 Sensitivity Adjustment
 Multy Defection Modes
 Come with rechargeable batteries

Sliding Gate Operator



AGS-SLG500/800/1200

Come with Keys in case of emergency or power failure.
Soft start and soft stop.
Resistance sensitivity and auto-closing delay time adjustable.
Stop/reverse in case if obstruction during gate opening/closing.
Reliable magnetic limit supplied.

Rolling Shutter Operator



AGS-RS600/800/1000/1200

Overheat protection and overload protection
Low noise
Easy manual operation when power failure
Precise/accurate Limit switch
Security-with anti-fall protection device

Swing Gate Operator



AGS/SG 600/800/1000

Soft start and soft stop,
Stop working when gate meets obstacle.
Clutch device for power failure,
Copper motor and gear worm for stable -
performance and longer working life
Adjustable opening/closing interval -
between master and slave gate.
Adjusting residence sensitivity

Sliding Door Operator



AGS-SLD-01

Intelligent micro control based system
Smart self-learning system
low noise, open and close smoothly
Built-in receiver working with learning code remote
Special track and hanger design to make safe working
Various terminal, work with access keypad, photocell, UPS,
interlock function

RFID Cards



AGS-P01
Proximity Thin Cards
Frequency : 125KHz




AGS-PT01
Proximity Thick Cards
Frequency : 125KHz



AGS-MF1K
Mifare 1KB Thin Cards
Frequency : 13.56MHz



AGS-UHF10
UHF Cards
860-960MHz

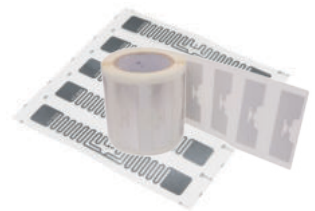

AGS-U-TG30
UHF Windshield Tags
Non Tearable
860-960 MHz

EM Locks, Housing with Power Supply



AGS-SD600LB
Holding Force : 280KG (600Lbs)
Single Door
Power : 12 to 24 VDC
Body Type : Zinc



AGS-HWS-150



AGS-2U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



AGS-9UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



AGS-4U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



AGS-6UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



AGS-42UN

Floor Standing Flexibox,
600W x 1000D/600W x 600D/ mm
Exquisite design with precise dimension and craftsmanship, Cable entry on Top and Bottom cover,Welded Frame, dependable structure, Material SPCC Cold Rolled SheetFront Toughened Glass Door and Back Steel Door with Lock and Keys, Turning angle of front and rear door over 180°



AGS-4UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\




AGS-6U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



AGS-24UN

Floor Standing Flexibox,
600W x 1000D/600W x 600D/ mm
Exquisite design with precise dimension and craftsmanship, Cable entry on Top and Bottom cover,Welded Frame, dependable structure, Material SPCC Cold Rolled SheetFront Toughened Glass Door and Back Steel Door with Lock and Keys, Turning angle of front and rear door over 180°



AGS-12UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have easy-to-remove knock outs. These knocks can be used for cable entry/exits\



Opp Nagar Nigam Plant
Major Asharam Road, Sihani Ghaziabad-201003

sales@agsplus.in

www.agsplus.in

+91 7290005894/95/96/97